


Anti-sulfurated · Small size · high precision thick film chip resistors HXC series

HXC03 (0402) HXC05 (0603) HXC10 (0805) *(): Inch size

■ Features

- Lineups from resistance tolerance $\pm 0.5\%$ to $\pm 0.1\%$
- The use of special inside termination contribute to high performance of anti-sulfuration.
- RoHS qualified
- ELV qualified
- AEC-Q200 qualified

■ Structure

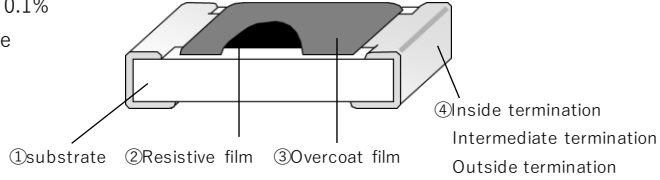

*This is only a schematic drawing of the structure.

■ Part No. Explanation (Example)


H	X	C	0	3	C	T	1	0	3	D
Product type			Rated power and Size		T.C.R	Packaging form	Nominal resistance value(*)			Resistance tolerance
HXC : Small size · precision			03:0.1W,0402 05:0.1W,0603 10:0.125W,0805		E: ± 25 C: ± 50 K: ± 100 ($10^{-6}/^{\circ}\text{C}$)	T : 4mm pitch taping ϕ 180 reel (HXC 03 is 2mm pitch)	The resistance value is indicated by 3-digit numbers. E96 sequence products Indicated by a 4-digit.			D: $\pm 0.5\%$ C: $\pm 0.25\%$ B: $\pm 0.1\%$

*The first two numbers are significant numbers, and the third one is the number of zeros "0" following to the first two numbers (multiple of 10).

*In the case of the E96 sequence, the first three values mean the significant figures and the fourth one represents the number of 0 following to them (multiplier of 10).

*If there is a decimal point in resistance value, it is indicated by "R" and all numbers are significant numbers.

■ Dimensions

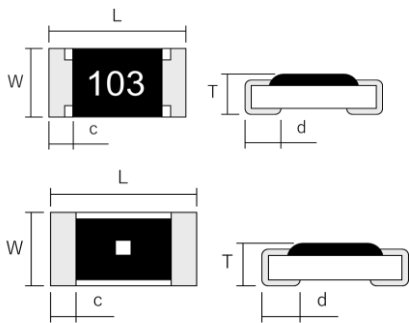

	L	W	T	c	d
HXC03	1.00 \pm 0.05	0.50 \pm 0.05	0.35 \pm 0.05	0.20 \pm 0.10	0.25 $\begin{matrix} +0.05 \\ -0.10 \end{matrix}$
HXC05	1.60 \pm 0.15	0.80 \pm 0.15	0.45 \pm 0.10	0.30 \pm 0.15	0.20 $\begin{matrix} +0.20 \\ -0.10 \end{matrix}$
HXC10	2.00 \pm 0.15	1.25 \pm 0.15	0.55 $\begin{matrix} +0.10 \\ -0.05 \end{matrix}$	0.35 $\begin{matrix} +0.20 \\ -0.15 \end{matrix}$	0.30 $\begin{matrix} +0.20 \\ -0.10 \end{matrix}$

* External dimensions are for reference only.

Overcoat film color : navy blue

The resistance value is indicated by 3-digit numbers

Indication color of resistance value : yellow

* HXC03 has no indication of resistance value.

Yellow ■ shows anti-sulfuration series.

(Unit: mm)

■ Ratings

	Rated power	Limiting element voltage(*1)	Maximum overload voltage(*2)	Range of rated resistance	Tolerance on rated resistance	Category temperature range	Temperature Coefficient of Resistance(T.C.R)		
HXC03	0.1W	50V	100V	10KΩ~180KΩ	B(±0.1%)	-55°C~+155°C	E	10KΩ~180KΩ	± 25 × 10 ⁻⁶ /°C
				100Ω~1MΩ	C(±0.25%)	-55°C~+155°C	C	100Ω~1MΩ	± 50 × 10 ⁻⁶ /°C
				10Ω~1MΩ	D(±0.5%)	-55°C~+155°C	K	10Ω~91Ω	± 100 × 10 ⁻⁶ /°C
					C		100Ω~1MΩ	± 50 × 10 ⁻⁶ /°C	
HXC05	0.1W	50V	100V	4.7KΩ~180KΩ	B(±0.1%)	-55°C~+155°C	E	4.7KΩ~180KΩ	± 25 × 10 ⁻⁶ /°C
				10Ω~1MΩ	C(±0.25%)	-55°C~+155°C	K	10Ω~91Ω	± 100 × 10 ⁻⁶ /°C
				10Ω~1MΩ	D(±0.5%)	-55°C~+155°C	C	100Ω~1MΩ	± 50 × 10 ⁻⁶ /°C
HXC10	0.125W	150V	200V	10Ω~1MΩ	D(±0.5%)	-55°C~+155°C	E	100Ω~230Ω	± 25 × 10 ⁻⁶ /°C
							C	10Ω~1MΩ	± 50 × 10 ⁻⁶ /°C

(*1) Rated voltage = $\sqrt{\text{Rated power} \times \text{Resistance value}}$

In the case of rated voltage over above limiting element voltage, limiting element voltage will be the maximum.

(*2) The applied voltage in short time overload test = 2.5 × rated voltage

In the case of the applied voltage in short time overload test over above maximum overload voltage, maximum overload voltage will be the maximum.


* There are the supplementary information about rating on reference page.

* Temperature Coefficient of Resistance (T.C.R) is based on JIS C5201-1 6.2 between two points:25°C and 125°C.

■ Specifications and test methods

Item	Specifications	Test method
Overload	± (2%+0.05Ω)	JIS C5201-1 8.1 2.5 × Rated voltage, for 5 seconds
Bend strength of the face plating	± (1%+0.05Ω)	JIS C5201-1 9.8 Bending distance : 3mm
Resistance to soldering heat	± (1%+0.05Ω)	JIS C5201-1 11.2 260 ± 5°C.10(sec.)
Solderability	Covered with more than 95%	JIS C5201-1 11.1 245 ± 3°C.(sec.)
Rapid change of temperature	± (1%+0.05Ω)	JIS C5201-1 10.1 -55°C⇄+125°C,1000(times)
Loadlife in humidity	± (2%+0.05Ω)	60 ± 2°C.90~95% R.H 1000h
Endurance at 70°C	± (2%+0.05Ω)	JIS C5201-1 7.1 70 ± 2°C.1000h

■ Derating curve

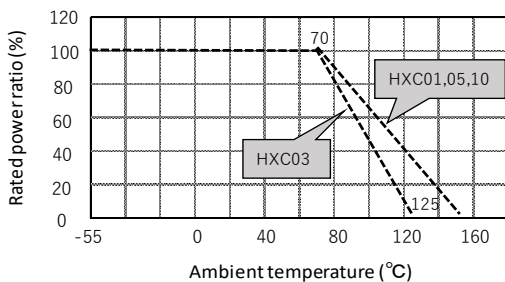

* Rated power of the resistor is the maximum power which can be loaded continuously at the ambient temperature of 70 °C. For the ambient temperature above 70°C, please use according to the load derating curve (dotted line). Please note that the component surface temperature does not exceed operating temperature range.