

Small size · high power thick film chip resistor VCX series

VCX01 (0201) VCX03 (0402) VCX10 (0805)


Recommendation

*() : Inch size

■ Features

- Guaranteed 0402 size 0.2W
- 50% rated power up than conventional resistors of the same size
- RoHS qualified
- ELV qualified
- AEC-Q200 qualified

■ Structure

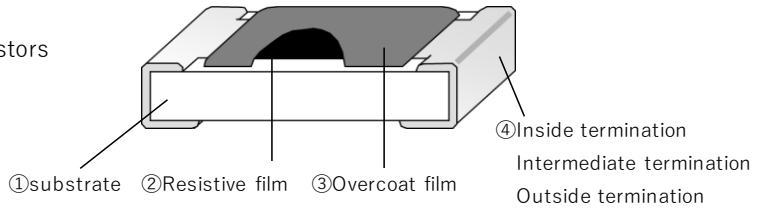

*This is only a schematic drawing of the structure.

■ Part No. Explanation (Example)


| V | C | X | 0 | 3 | | T | 1 | 0 | 3 | J |
|----------------------------------|---|---|--|---|-------------------------|------------------------------------|---|---|---|---------------------------------|
| Product type | | | Rated power and Size | | T.C.R | Packaging form | Nominal resistance value(*) | | | Resistance tolerance |
| VCX : small size · high power | | | 01:0.1W,0201 03:0.2W,0402 10:0.6W,0805 | | Refer to "■ Ratings" | T : 4mm pitch taping φ 180 reel | The resistance value is indicated by 3-digit numbers. E96 sequence products are indicated by a 4-digit. | | | J: ± 5% F: ± 1% D: ± 0.5% |

*The first two numbers are significant numbers, and the third one is the number of zeros "0" following to the first two numbers (multiple of 10).

*In the case of the E96 sequence, the first three values mean the significant figures and the fourth one represents the number of 0 following to them (multiplier of 10).

*If there is a decimal point in resistance value, it is indicated by "R" and all numbers are significant numbers.

■ Dimensions

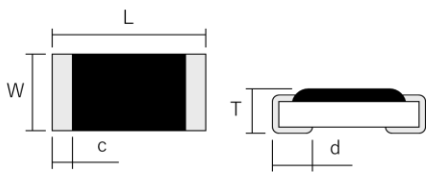

| | L | W | T | c | d |
|-------|-------------|-------------|--------------------------------|--------------------------------|--------------------------------|
| VCX01 | 0.60 ± 0.03 | 0.30 ± 0.03 | 0.23 ± 0.03 | 0.10 ± 0.05 | 0.15 ± 0.05 |
| VCX03 | 1.00 ± 0.05 | 0.50 ± 0.05 | 0.35 ± 0.05 | 0.20 ± 0.10 | 0.25 ^{+0.05} -0.10 |
| VCX10 | 2.00 ± 0.15 | 1.25 ± 0.15 | 0.55 ^{+0.10} -0.05 | 0.25 ^{+0.20} -0.15 | 0.40 ± 0.15 |

* External dimensions are for reference only.

Overcoat film color : Black

(Unit: mm)

■ Ratings

| | Rated power | Limiting element voltage(*1) | Maximum overload voltage(*2) | Range of rated resistance | Tolerance on rated resistance | Category temperature range | Temperature Coefficient of Resistance(T.C.R) | | | |
|-------|-------------|------------------------------|------------------------------|---------------------------|-------------------------------|----------------------------|--|--------------|-----------|---------------------------|
| | | | | | | | | | | |
| VCX01 | 0.1W | 50V | 100V | 10Ω~180kΩ | J (±5%) D (±0.5%) | -55°C~+155°C | | +25°C~+155°C | 10Ω~180kΩ | ±200×10 ⁻⁶ /°C |
| VCX03 | 0.2W | 50V | 100V | 1Ω~1MΩ | J (±5%) | -55°C~+155°C | | +25°C~+155°C | 1Ω~1MΩ | ±200×10 ⁻⁶ /°C |
| | | | | 1Ω~1MΩ | F (±1%) D (±0.5%) | -55°C~+155°C | T | +25°C~+155°C | 1Ω~9.1Ω | ±150×10 ⁻⁶ /°C |
| | | | | | | | | +25°C~+155°C | 10Ω~1MΩ | ±100×10 ⁻⁶ /°C |
| VCX10 | 0.6W | 200V | 400V | 1Ω~1MΩ | J (±5%) F (±1%) | -55°C~+155°C | | +25°C~+155°C | 1Ω~1MΩ | ±200×10 ⁻⁶ /°C |
| | | | | 1Ω~1MΩ | D (±0.5%) | -55°C~+155°C | T | +25°C~+155°C | 1Ω~1MΩ | ±100×10 ⁻⁶ /°C |

(*1) Rated voltage = $\sqrt{\text{Rated power} \times \text{Resistance value}}$

In the case of rated voltage over above limiting element voltage, limiting element voltage will be the maximum.

(*2) The applied voltage in short time overload test = 2.5×rated voltage

In the case of the applied voltage in short time overload test over above maximum overload voltage, maximum overload voltage will be the maximum.


* There are the supplementary information about rating on reference page.

* Temperature Coefficient of Resistance (T.C.R) is based on JIS C5201-1 6.2 between two points: 25°C and 155°C.

■ Specifications and test methods

| Item | Specifications | Test method |
|-----------------------------------|----------------------------|---|
| Overload | ± (2%+0.05 Ω) | JIS C5201-1 8.1 2.5 × Rated voltage, for 5 seconds |
| Bend strength of the face plating | ± (1%+0.05 Ω) | JIS C5201-1 9.8 Bending distance : 3mm |
| Resistance to soldering heat | ± (1%+0.05 Ω) | JIS C5201-1 11.2 260 ± 5°C.10(sec.) |
| Solderability | Covered with more than 95% | JIS C5201-1 11.1 245 ± 3°C.(sec.) |
| Rapid change of temperature | ± (1%+0.05 Ω) | JIS C5201-1 10.1 -55°C⇄+125°C,1000(times) |
| Loadlife in humidity | ± (3%+0.05 Ω) | 60 ± 2°C.90~95% R.H 1000h |
| Endurance at 70°C | ± (3%+0.05 Ω) | JIS C5201-1 7.1 70 ± 2°C.1000h |

■ Derating curve

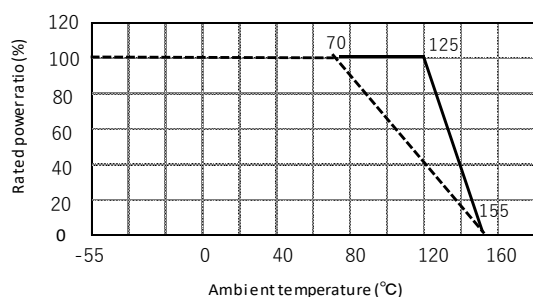

*Rated power of the resistor is the maximum power which can be loaded continuously at the ambient temperature of 70 °C. For the ambient temperature above 70°C, please use according to the load derating curve (dotted line). Please note that the component surface temperature does not exceed operating temperature range.

*If the component temperature is below 155°C, the power rating can be used according to the load derating curve in the solid line.