

**Anti-sulfurated · High-power · wide-terminal type thick film chip resistor VXW series**


VXW10 (0508) VXW18 (0612) \*( ) : Inch size

**Recommendation**

■ Features

- Improved rated power compared to conventional wide terminal products  
1220 size 0.8W、1632 size 1.25W
- The use of special inside termination contribute to high performance of anti-sulfuration.
- RoHS qualified
- ELV qualified
- AEC-Q200 qualified

■ Structure

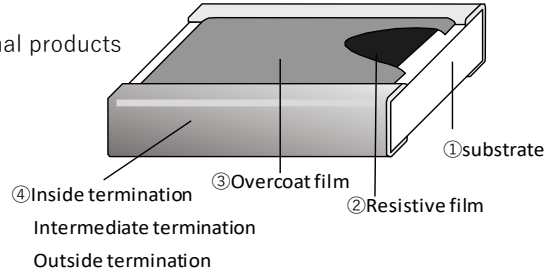


■ Part No. Explanation (Example)

V	X	W	1	0		T	1	0	3	J
Product type			Rated power and Size		T.C.R	Packaging form	Nominal resistance			Resistance
VXW : Wide terminal type			10:0.8W,0508 18:1.25W,0612		T: ±100 (10 <sup>-6</sup> /°C)	T : 4mm pitch taping φ 180 reel	The resistance value is indicated by 3-digit numbers.			J: ±5% F: ±1%

- \*The first two numbers are significant numbers, and the third one is the number of zeros "0" following to the first two numbers (multiple of 10).
- \*If there is a decimal point in resistance value, it is indicated by "R" and all numbers are significant numbers.


■ Dimensions

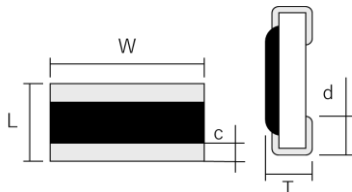

	L	W	T	c	d
VXW10	1.25 ± 0.15	2.00 ± 0.15	0.55 <sup>+0.10</sup> <sub>-0.05</sub>	0.25 <sup>+0.20</sup> <sub>-0.15</sub>	0.35 ± 0.15

- \* External dimensions are for reference only. (Unit: mm)
- \* VXW10 has no indication of resistance value.

Overcoat film color : navy blue



	L	W	T	c	d
VXW18	1.60 ± 0.15	3.20 ± 0.15	0.55 <sup>+0.10</sup> <sub>-0.05</sub>	0.20 ± 0.15	0.35 ± 0.15

- \* External dimensions are for reference only. (Unit: mm)
- \* VXW18 has no indication of resistance value.

Yellow ■ shows anti-sulfuration series.

Overcoat film color : black

## ■ Ratings

	Rated power	Limiting element voltage(*1)	Maximum overload voltage(*2)	Range of rated resistance	Tolerance on rated resistance	Category temperature range	Temperature Coefficient of Resistance(T.C.R)	
VXW10	0.8W	200V	400V	1Ω~1MΩ	J(±5%) F(±1%)	-55°C~+155°C	+25°C~+155°C	±200×10 <sup>-6</sup> /°C
							+25°C~+155°C	±100×10 <sup>-6</sup> /°C
							-55°C~+25°C	±200×10 <sup>-6</sup> /°C
VXW18	1.25W	200V	400V	0.1Ω~1MΩ	J(±5%) F(±1%)	-55°C~+155°C	+25°C~+155°C	±200×10 <sup>-6</sup> /°C
							+25°C~+155°C	±200×10 <sup>-6</sup> /°C

(\*1) Rated voltage =  $\sqrt{\text{Rated power} \times \text{Resistance value}}$

In the case of rated voltage over above limiting element voltage, limiting element voltage will be the maximum.

(\*2) The applied voltage in short time overload test = 2.5×rated voltage

In the case of the applied voltage in short time overload test over above maximum overload voltage, maximum overload voltage will be the maximum.


\* There are the supplementary information about rating on reference page.

\* Temperature Coefficient of Resistance (T.C.R) is based on JIS C5201-1 6.2 between two points: 25°C and 125°C.

## ■ Specifications and test methods

Item	Specifications	Test method
Overload	±(2%+0.05Ω)	JIS C5201-1 8.1 2.5×Rated voltage, for 5 seconds
Bend strength of the face plating	±(1%+0.05Ω)	JIS C5201-1 9.8 Bending distance : 3mm
Resistance to soldering heat	±(1%+0.05Ω)	JIS C5201-1 11.2 260±5°C.10(sec.)
Solderability	Covered with more than 95%	JIS C5201-1 11.1 245±3°C.(sec.)
Rapid change of temperature	±(1%+0.05Ω)	JIS C5201-1 10.1 -55°C⇄+125°C,1000(times)
Loadlife in humidity	±(3%+0.05Ω)	60±2°C.90~95% R.H 1000h
Endurance at 70°C	±(3%+0.05Ω)	JIS C5201-1 7.1 70±2°C.1000h

## ■ Derating curve

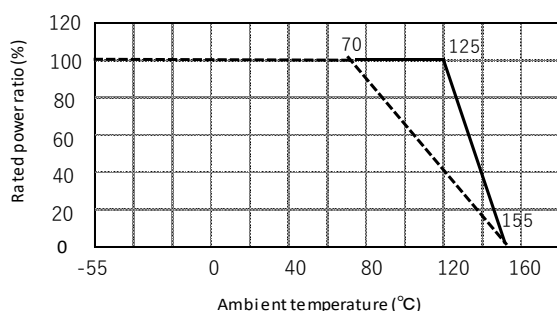

\* Rated power of the resistor is the maximum power which can be loaded continuously at the ambient temperature of 70 °C. For the ambient temperature above 70°C, please use according to the load derating curve (dotted line). Please note that the component surface temperature does not exceed operating temperature range.

\* If the component temperature is below 155°C, the power rating can be used according to the load derating curve in the solid line.