

## Super anti-surge thick film chip resistors ZPS series


ZPS05 (0603) ZPS10 (0805) \* ( ) : Inch size

Recommendation

### ■Features

- Guaranteed 0603 size 0.3W, 0805 size 0.5W
- $\pm 0.5$  resistance tolerance is in lineup.
- ESD (new JASO condition) 15KV is applied, resistance change rate within 10% (actual value)
- RoHS qualified
- ELV qualified
- AEC-Q200 qualified

### ■Structure

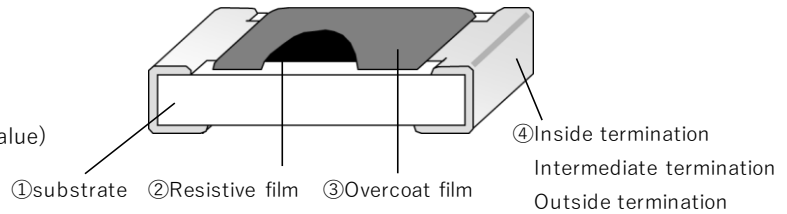

\*This is only a schematic drawing of the structure.


### ■Part No. Explanation (Example)

Z	P	S	0	5		T	1	0	3	J
Product type			Rated power and Size		T.C.R	Packaging form	Nominal resistance value(*)			Resistance tolerance
ZPS : super Anti-surge thick film chip resistors			05:0.3W,0603 10:0.5W,0805		Refer to "■Ratings"	T : 4mm pitch taping $\phi$ 180 reel	The resistance value is indicated by 3-digit numbers. E96 sequence products are indicated by a 4-digit.			J: $\pm 5\%$ F: $\pm 1\%$ D: $\pm 0.5\%$

\*The first two numbers are significant numbers,  
and the third one is the number of zeros "0" following to the first two numbers (multiple of 10).

\*In the case of the E96 sequence,  
the first three values mean the significant figures and the fourth one represents the number of 0 following to them (multiplier of 10).  
If there is a decimal point in resistance value, it is indicated by "R" and all numbers are significant numbers.

### ■Dimensions

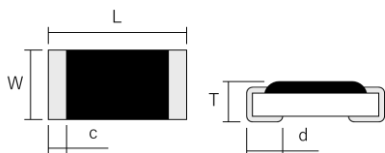

\* External dimensions are for reference only.  
Overcoat film color : Black

	L	W	T	c	d
ZPS05	$1.60 \pm 0.10$	$0.80 \pm 0.10$	$0.45 \pm 0.10$	$0.25^{+0.15}_{-0.10}$	$0.25^{+0.15}_{-0.10}$
ZPS10	$2.00 \pm 0.15$	$1.25 \pm 0.15$	$0.55^{+0.10}_{-0.05}$	$0.25^{+0.20}_{-0.15}$	$0.40 \pm 0.15$

(Unit: mm)

## ■ Ratings

	Rated power	Limiting element voltage(*1)	Maximum overload voltage(*2)	Range of rated resistance	Tolerance on rated resistance	Category temperature range	Temperature Coefficient of Resistance (T.C.R)			
ZPS05	0.3W	150V	200V	J品 : 0.1Ω~10MΩ	J(±5%)	-55°C~+155°C		+25°C~+125°C	0.1Ω~9.1Ω	±250×10 <sup>-6</sup> /°C
									10Ω~10MΩ	±200×10 <sup>-6</sup> /°C
				F品 : 0.1Ω~1.5MΩ	F(±1%)	-55°C~+155°C	Z	+25°C~+125°C	0.1Ω~0.91Ω	±150×10 <sup>-6</sup> /°C
								+25°C~+125°C	1Ω~9.1Ω	±250×10 <sup>-6</sup> /°C
				D品 : 0.1Ω~1.5MΩ	D(±0.5%)	-55°C~+155°C	Z	+25°C~+125°C	10Ω~1.5MΩ	±200×10 <sup>-6</sup> /°C
							K	+25°C~+125°C	0.1Ω~0.976Ω	±150×10 <sup>-6</sup> /°C
ZPS10	0.5W	200V	400V	J品 : 0.1Ω~10MΩ	J(±5%)	-55°C~+155°C		+25°C~+125°C	0.1Ω~0.91Ω	±250×10 <sup>-6</sup> /°C
									1Ω~10MΩ	±200×10 <sup>-6</sup> /°C
				F品 : 0.1Ω~1.5MΩ	F(±1%)	-55°C~+155°C		+25°C~+125°C	0.1Ω~0.91Ω	±250×10 <sup>-6</sup> /°C
									1Ω~1.5MΩ	±200×10 <sup>-6</sup> /°C
				D品 : 0.1Ω~1.5MΩ	D(±0.5%)	-55°C~+155°C	W	+25°C~+155°C	0.1Ω~0.976Ω	±100×10 <sup>-6</sup> /°C
								-30°C~+25°C		±120×10 <sup>-6</sup> /°C
-40°C~+25°C	±125×10 <sup>-6</sup> /°C									
	K	+25°C~+125°C		1Ω~1.5MΩ	±100×10 <sup>-6</sup> /°C					

(\*1) Rated voltage =  $\sqrt{\text{Rated power} \times \text{Resistance value}}$

In the case of rated voltage over above limiting element voltage, limiting element voltage will be the maximum.

(\*2) The applied voltage in short time overload test = 2.5 × rated voltage

In the case of the applied voltage in short time overload test over above maximum overload voltage, maximum overload voltage will be the maximum.


\* There are the supplementary information about rating on reference page.

\* Temperature Coefficient of Resistance (T.C.R) is based on JIS C5201-1 6.2 between two points: 25°C and 125°C.

## ■ Specifications and test methods

Item	Specifications	Test method
Overload	± (2%+0.05Ω)	JIS C5201-1 8.1 2.5 × Rated voltage, for 5 seconds
Bend strength of the face plating	± (1%+0.05Ω)	JIS C5201-1 9.8 Bending distance : 3mm
Resistance to soldering heat	± (1%+0.05Ω)	JIS C5201-1 11.2 260 ± 5°C.10(sec.)
Solderability	Covered with more than 95%	JIS C5201-1 11.1 245 ± 3°C.(sec.)
Rapid change of temperature	± (1%+0.05Ω)	JIS C5201-1 10.1 -55°C ⇄ +125°C,1000(times)
Loadlife in humidity	± (2%+0.05Ω)	60 ± 2°C.90~95% R.H 1000h
Endurance at 70°C	± (2%+0.05Ω)	JIS C5201-1 7.1 70 ± 2°C.1000h

## ■ Derating curve

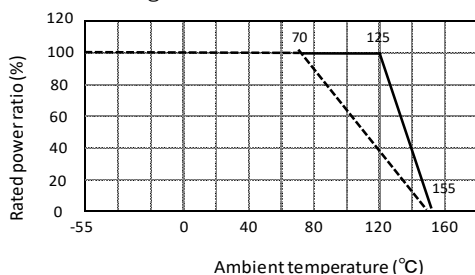

\* Rated power of the resistor is the maximum power

which can be loaded continuously at the ambient temperature of 70 °C.

For the ambient temperature above 70°C,

please use the item according to the load derating curve (dotted line)

Please note that the component surface temperature

does not exceed operating temperature range.

\* If the component temperature is below 155°C,

the power rating can be used according to the load derating curve in the solid line.